

## MD020020


### Gearbox Specifications

Outer diameter	20mm	Bearing	Porous bearing	Rolling bearing
Material	Metal	Axial endplay	0.3mm	0.1mm
Direction of rotation	cw & ccw	Radial loading on output shaft	50N	75N
Gear backlash	2° Customizable	Operating temperature range	-30 - +100	

### Gearbox Stages

	1	2	3	4
Reduction ratio	4 / 6	16 / 24 / 36	64 / 96 / 144 / 216	256 / 384 / 576 / 864 / 1296
gf.cm Max rated torque of gearbox (gf.cm)	10000	10000	10000	10000
gf.cm Instant torque of gearbox (gf.cm)	25000	25000	25000	25000
% Gearbox efficiency %	90	81	72	65
mm Gearbox length L1 (mm)	17.6	22.9	28.2	33.5

### 技术插图 | Technical Drawing

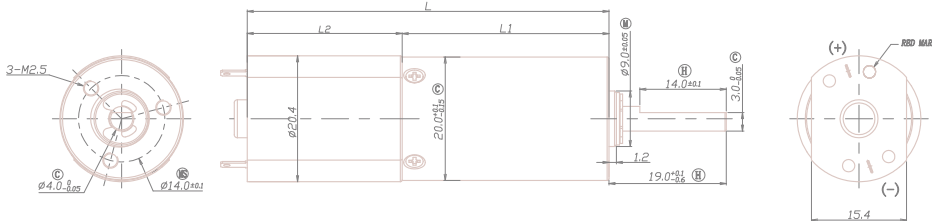

### Motor Specifications

( ) Motor type (optional)	Brushed DC motor Brushless DC motor Coreless motor Stepper motor	Input speed	15000rpm
( ) Voltage (optional)	3-24V	Current	300mA max

: 12V 7200rpm

Parameter (values at 12V & 7200rpm) The following data is for reference only.

Model	Rated Speed 额定转速	Max Speed 最高转速	Max Rated Torque 额定容许力矩	Max Instant Torque 瞬间容许力矩	Reduction Ratio 减速比	Gearbox Length 减速箱长 L1	Overall Length 总长 L
	rpm	rpm	gf.cm	gf.cm		mm	mm
MD020020-4	1875	7500	10000	25000	4	17.6	42.7
MD020020-6	1250	5000	10000	25000	6		
MD020020-16	469	1875	10000	25000	16	22.9	48
MD020020-24	313	1250	10000	25000	24		
MD020020-36	208	833	10000	25000	36		
MD020020-64	117	469	10000	25000	64	28.2	53.3
MD020020-96	78	313	10000	25000	96		
MD020020-144	52	208	10000	25000	144		
MD020020-216	35	139	10000	25000	216		
MD020020-256	29	117	10000	25000	256	33.5	58.6
MD020020-384	20	78	10000	25000	384		
MD020020-576	13	52	10000	25000	576		
MD020020-864	9	35	10000	25000	864		
MD020020-1296	6	23	10000	25000	1296		

Please contact us for customized products